

LED FULL CUT WALLPACK

SPECIFICATIONS

SKU	OWF1004	OWF1003
Wattage	80W	120W
Lumens	10800lm	16200lm
CCT	4000K/5000K/5700K	4000K/5000K/5700K
CRI	Ra>70	Ra>70
LED QTY	192PCS (2835)	280PCS (2835)
Input	120-277VAC@ 50/60Hz Max 1.4A	120-277VAC@50/60H z Max 1.85A
THD	<20%	<20%
Surge	L-N: 2KV L/N-E 4KV	L-N: 2KV L/N-E 4KV
Beam Angle	TYPE 3S	TYPE 3S
IP Rating	IP65	IP65
Power Factor	≥0.95	≥0.95
Dimmable	0-10V	0-10V
Sensor	RECEPTACLE (multifunction sensor)	
Efficacy	135LM/W (±10%)	135LM/W (±10%)
IK Degree	IK08	IK08
Finish	Bronze	Bronze
Replaces PSMH	240W	360W
Warranty	5 Years	5 Years
Certificates	ETL/cETL, DLC 5.1 Premium	

BOOK18
Zhaga
Multifunction DOS



FEATURES

- Easy Installation
- Thermal Head Dissipation
- Premium LED Chips
- J Hook Mount
- IP65 Water Proof
- CRI>70
- Low-Cost Maintenance
- Motion Sensor (Optional)
- Thermal Head Dissipation
- Beam Angle 90 Degrees
- 0-10 Dimmable
- Rebate Eligible

Neutron Supply





255 East 17th Street, Paterson NJ 07525 Tel: 973.261.9596

E-Mail: info@neutron.supply www.neutron.supply

© 2023 Neutron Supply. All Rights Reserved

LED FULL CUT WALLPACK



DIMENSIONS

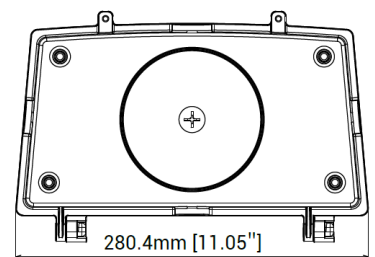



OWF1004

OWF1003

PHOTOMETRIC

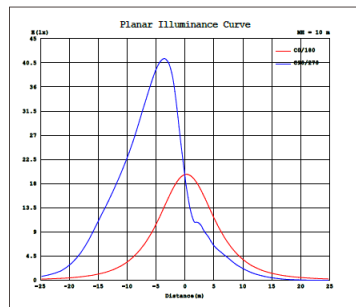

OMW1004

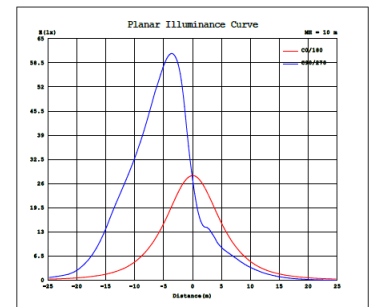

OWF1003

Project Name:
Type:
Catalog Number:
Voltage:
Approved By:
Date:

Neutron Supply


255 East 17th Street, Paterson NJ 07525 Tel: 973.261.9596

E-Mail: info@neutron.supply www.neutron.supply

© 2023 Neutron Supply. All Rights Reserved

LED FULL CUT WALLPACK

Detection Area	Short press to set detection area 25% / 50% / 75% / 100% + Long press (>3s) to transmit selected value
Hold Time	Short press to set hold time 0S / 30S / 1min / 3min / 5min / 10min / 20min / 30min Long press >3s to transmit selected value
Daylight Threshold	Short press to set daylight threshold 5Lux / 15Lux / disable Long press >3 to transmit selected value When set daylight threshold to disable , sensor will switch on light when detect motion regardless of ambient brightness level
Send	Short press to transmit all selected value on remote screen
Stand-By Period	Short press to set standby period 0S / 30S / 1min / 3min / 5min / 10min / 20min / 30min / +∞ Long Press >3s to transmit selected value
Stand-by DIM Level	Short press to set standby dimmin level 10% / 20% / 30% / 50% Long Press >3s to transmit selected value
Auto Mode	Short press to set working mode: MD = Motion + Daylight Priority (daylight switch) / Daylight Harvesting; P = Daylight priority / Daylight Harvesting Long press >3s to transmit selected mode Note: MP or P is not available for all models. Please follow spec sheet of motion sensor
ON / OFF	When set light on, when power turn off and on again, light will be on. When set light off, when power turn off and on again, light will be on for 9 seconds and then off
Motion Sensor	Short Press to quit from constant on/off mode, sensor start to work (the previous setting stays in validity)
DIM+ / DIM-	Short press to set occupancy light level 50%-100% in MD mode; Set target lux level in MP (Motion+Daylight Harvesting) mode; Dim level will change 5% each time button is pressed
Reset	Detection Area: 100%; Hold Time: 30min Daylight Sensor: Disable; Stand-by Period: 30min; Stand-by Dim Level: 30%
Quick Settings	Option 1. Short press to show setting configuration, long press >3s to save this configuration. Press "send" to transmit selected quicksetting Option 2. Short press to show the setting configuration, long press>3s to save this configuration. Press "send" to transmit selected quicksetting
H/L	Short press to set high H sensitivity (open application; L low sensitivity (applied in reflection surface around area)
S	N/A

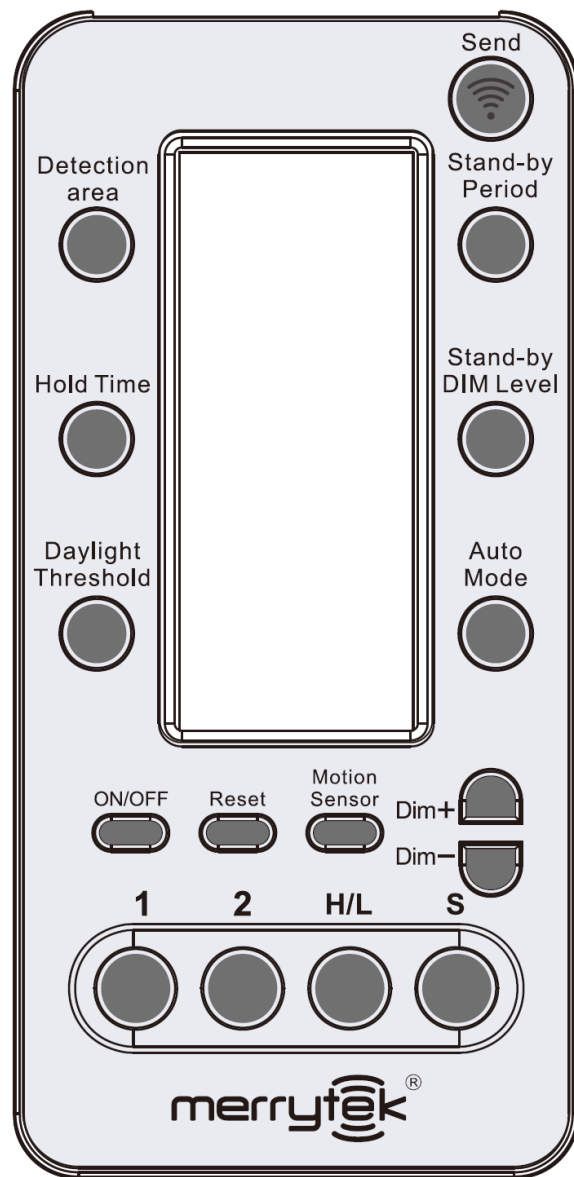

SKU: MH12

Neutron Supply

255 East 17th Street, Paterson NJ 07525 Tel: 973.261.9596

E-Mail: info@neutron.supply www.neutron.supply

© 2023 Neutron Supply. All Rights Reserved